


# 16-slots Dual Power 100M Fiber Optic Center

19 inch Standard Rack, 2U size, SFC200 series Fiber Optic Converter Center, 16 Slots

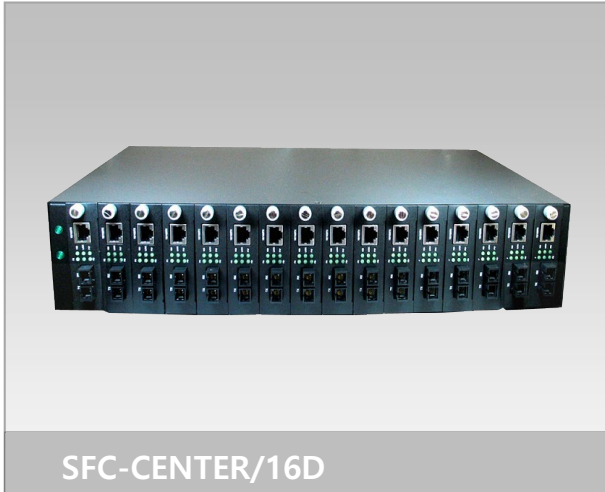

- Standard 19" Rack Mounting Fiber Optic Center
- 16-slot mounting of Fiber Optic Converter
- AC Dual Power Support
- 16 Slot unit, 2 Power Supply
- 16 Slot Chassis for SFC200 series

SFC-CENTER/16D

## Specification

|                    |                     |   |
|--------------------|---------------------|---|
| <b>Standard</b>    | - Standard          | 19 inch standard Rack, 2U size  |
| <b>Interface</b>   | - RJ45 Port         | 10/100Mbps, Auto MDI/MDI-X<br>UTP Cat3~6Cable EIA/TIA-568 100-OHM(Transmission distance 100M)                         |
|                    | - Fiber Port        | 100Mbps: 1-port, 100Base-FX (SC connector)<br>Multi-mode: 62.5/125 $\mu$ m(220m)<br>Single-mode:9/125 $\mu$ m(~100km) |
|                    | - LED Indication    | Power A. Power B  |
|                    | - Temperature Range | Operation: - 0°C ~ 60°C , Storage: - 20°C ~ 80°C  |
|                    | - Humidity          | 5 ~ 95% (Non-condensing)  |
|                    | - Installation      | 19" RACK mount (2U)   |
| <b>Input Power</b> |                     | 110VAC or 220VAC, 50/60Hz, Power redundant(Optional)  |
| <b>Dimension</b>   |                     | 440.8mm(W) x 250mm(D) x 89mm(H)   |

## Ordering Guide

| Model Type     | Specification  |
|----------------|--|
| SFC CENTER/16  | 16 Slot unit, 1Power Supply, SFC200 Series             |
| SFC CENTER/16D | 16 Slot unit, 2Power Supply, SFC200 Series, Dual Power |